

Apron 2 and Taxiway Echo Construction Notice 2019


1.0 DRAINAGE WORKS

Alpha Aviation Inc. would like to notify all tenants that the City of Delta will be completing construction of drainage systems that will impact the operation of Apron 2 and a portion of the apron leading to taxiway Echo commencing in the next week through to the middle of May. The work will involve trenching through the apron to install drainage pipes. In order to minimize impact the apron will be open at all times and the work areas protected by fencing. Please see diagrams below for the approximate locations. An advisory NOTAM will be issued.

2.0 SCOPE OF WORK


The project involves the following work:

- Removal of concrete and ditching
- Pipe installation
- Replacement of concrete
- Clearing of drainage ditches
- Work will be completed in sections
- Access road to Apron 3 will be impacted but kept open

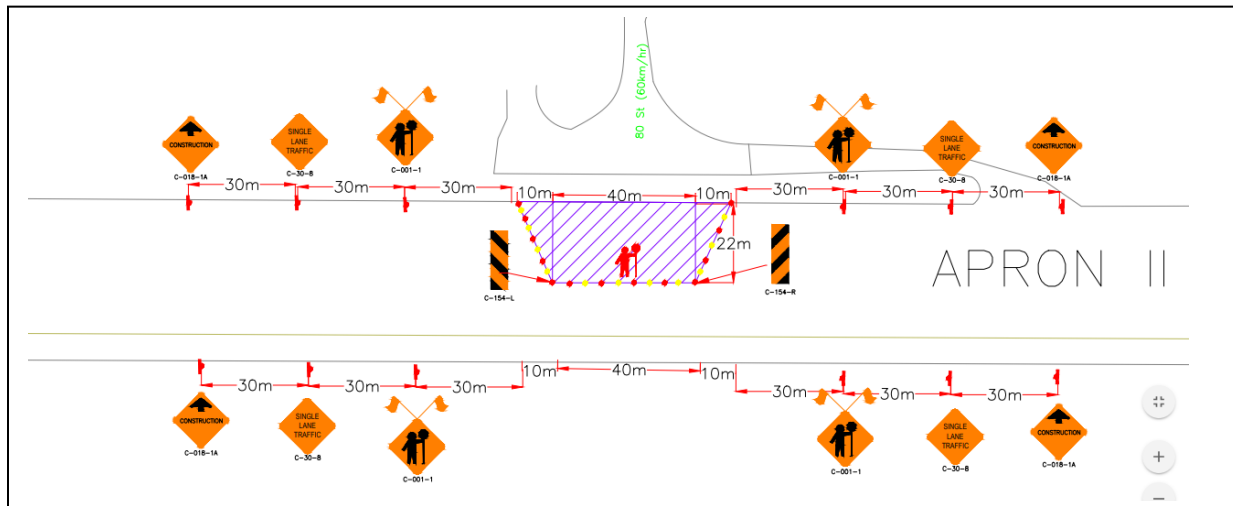

3.0 AIRSIDE SAFETY AND ESCORTING REQUIREMENTS

The construction contractor will be provided airside escorting services by Alpha Aviation during the construction stages of this project. The Contractor will work closely with Alpha Aviation to maintain airside security at the access point used by construction equipment/personnel. The contractor will submit a safety plan to Alpha Aviation Inc. prior to commencing work.

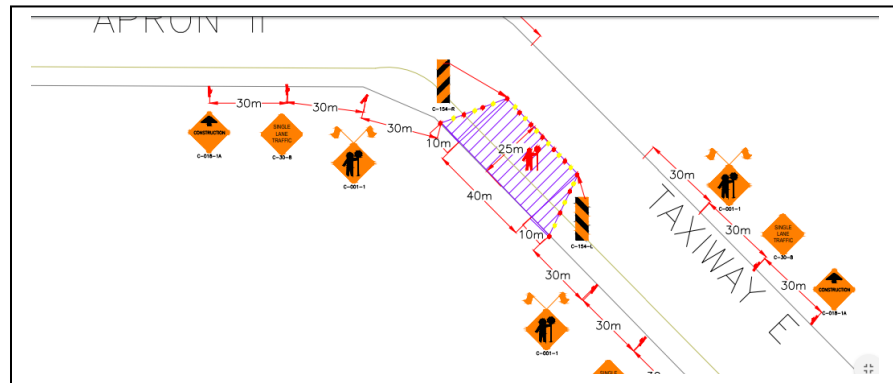

4.0 SAFETY BARRICADES AND HAZARD LIGHTING

The active work areas will be fenced off using medium height fencing and appropriate marking. Alpha Aviation works directly with the fence rental company to ensure appropriate access and operational control during periods of construction.

Construction Zone Fencing

